

BANK REPAIRS ON THE SANTA ROSA CHANNEL IN MARICOPA

REQUEST FOR PROPOSAL NO: **SRW2021.01**

ADDENDUM NO. 1

NO. OF PAGES: 4

August 19, 2020

This addendum addresses a change in the timeline of the project, includes a map of the 14 project sites for reference and includes scope details for each site. It also provides an engineer's plans specifying application of rip rap and landscape material.

DEADLINE FOR SUBMITTING QUESTIONS ON THIS RFP IS 5:00 P.M. AUGUST 27, 2020

MARICOPA FLOOD CONTROL DISTRICT

RFP NO: SRW2021.01

BANK REPAIRS ON THE SANTA ROSA CHANNEL IN MARICOPA

A. SCHEDULE OF EVENTS


<u>ACTIVITY</u>	<u>DATE (All 2020)</u>
Release RFP	July 29
Mandatory Pre-proposal meeting	August 18
Proposals Due	September 9
Proposed Award Notification	September 17 October 8
Project to Commence	No later than October 19

B. TABLE OF CONTENTS

COVER PAGE
INDEX PAGE.....PG 3
GENERAL INFORMATION.....PG 4
GENERAL REQUIREMENTS.....PG 6
PROPOSAL REQUIREMENTS.....PG 6
EVALUATION CRITERIA.....PG 13

ATTACHMENT A

A. NON-COLLUSION AFFIDAVITPG 23
B. SIGNATURE AND BID PAGE.....PG 24
C. LEGAL STATUS.....PG 25

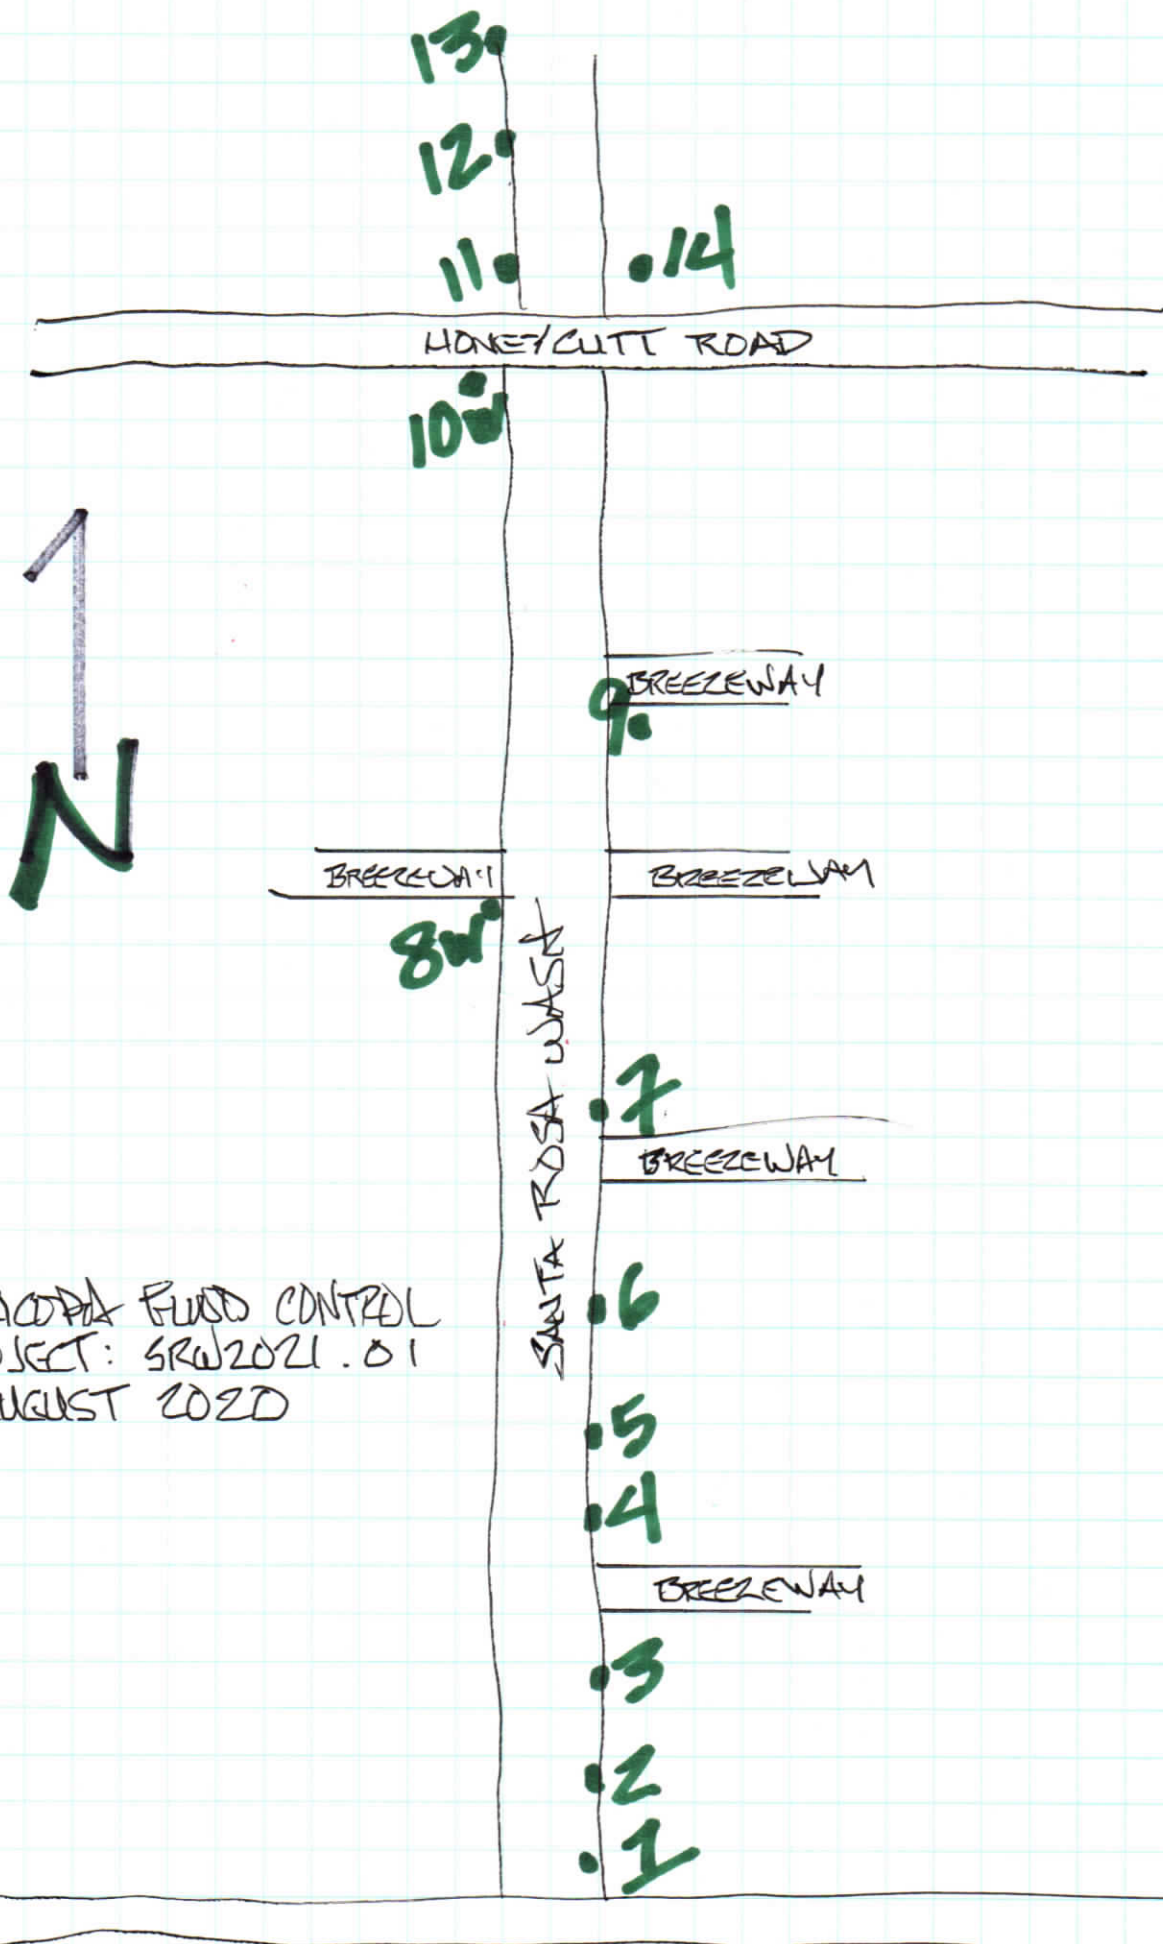

MARICOPA FLOOD CONTROL
 PROJECT: SRW2021.01
 AUGUST 2020

SCOPE DETAILS FOR MFCD SRW2021.01

This is meant to describe use of fabric, rip rap and geotech testing. Refer to original scope for details concerning excavation, unless specifically noted here.

***ALL FABRIC TO BE INSTALLED PER PLAN. DETAIL C.
RIP RAP TO BE INSTALLED PER PLAN DETAIL A.***

1. NO FABRIC. GEOTECH TESTING
2. REMOVE TREE IF NEEDED. NO FABRIC. NO GEOTECH TESTING.
3. EXCAVATE FROM WALL TO MAT (APPROX. 10-12 YDS) DOWN ABOUT 6-8 FT. NO FABRIC.
GEOTECH TESTING NEEDED.
4. FABRIC NEEDED. NO GEOTECH TESTING.
5. FABRIC NEEDED. GEOTECH TESTING.
6. EXCAVATE FROM WALL DOWN ABOUT HALFWAY TO BOTTOM. FABRIC NEEDED. GEOTECH
TESTING.
7. EXCAVATE FROM WALL DOWN ABOUT HALFWAY TO BOTTOM. FABRIC NEEDED. GEOTECH
TESTING.
8. WESTBANK. FABRIC NEEDED. GEOTECH TESTING. RIP RAP. DETAIL A.
9. FABRIC NEEDED. GEOTECH TESTING. RIP RAP.
10. WEST BANK. FABRIC NEEDED. GEOTECH TESTING. RIP RAP.
11. WEST BANK. FABRIC NEEDED. GEOTECH TESTING. RIP RAP.
12. WEST BANK. FABRIC NEEDED. NO GEOTECH TESTING.
13. WEST BANK. FABRIC NEEDED. GEOTECH TESTING. RIPRAP.
14. GRADE TO EVEN SLOPE. COMPACT TO +/-90%. NO GEOTECH TESTING. NO FABRIC.